

# IN THE CREASE

## Wall Mat Installation




**WARNING:** Failure to read the warnings in these instructions can result in bodily injury. Mat installation is to be performed by **ADULTS ONLY**.

### ⚠️ **WARNING Before Beginning** ⚠️

Springs have tension energy that may cause them to snap or become airborne causing personal injury. Wear gloves and safety glasses at all times.

**SAFETY INSTRUCTIONS:** Do not install or use this product unless you have read and understand all of the information contained in these instructions. If you do not understand the instructions, you may ship your wall with the mat to the address below for a no-charge mat installation service. We will install the mat and ship the wall back to you free of charge. You will be responsible for paying the shipping charge to deliver your wall to us.

⚠️ **Removal and installation of springs requires the use of the spring hook tool provided. Failure to use this tool could result in personal injury.**

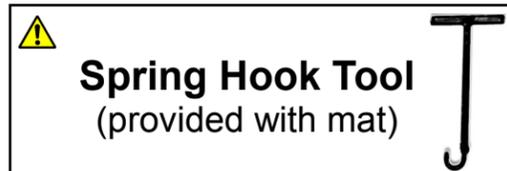


⚠️ **The following steps 3 - 5 require the use of a hammer. A tapping force is required with wrist action only. The more force exerted, the greater the risk personal injury could occur.**




**Step 1: Mat Removal:** For ideal mat installation, lay your wall down horizontally on a flat surface.

A. **To Save Mat:** Begin by using the spring hook tool (provided) and begin removing springs by hooking the tool into the frame side of the spring loop and firmly pull up and away from the wall frame to release. (image A1.) An additional adult to hold the opposite side of the wall to offset the force needed to release the springs may be required.

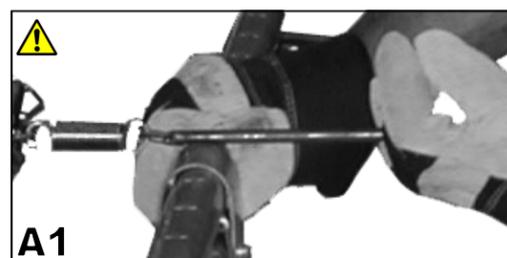


**Step 3:** To attach the new mat: Place one spring in the middle of each four sides.


Pull each spring taught with the spring hook tool and tap it with a hammer for the spring tip to start into the frame slot. Before removing the spring hook tool, make sure the spring loop is securely in the frame slot.

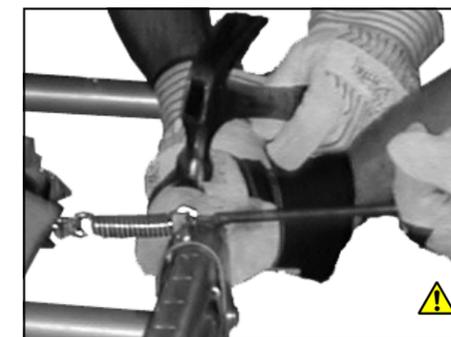

B. **Not Saving Mat:** ⚠️ **This step requires the use of a utility knife. Failure to use a utility knife properly could result in personal injury.** Carefully cut across the mat in a cross pattern with a utility knife for un-sprung removal of mat and springs. Then remove matting and all springs (image B1).

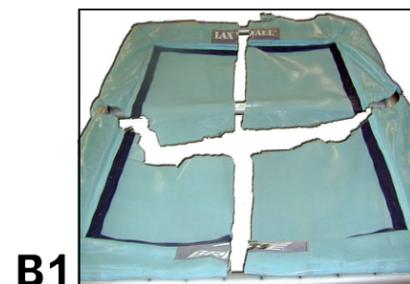

**Step 4:** Proceed with putting springs on, working from the middle of the mat towards the corners inserting every other spring.

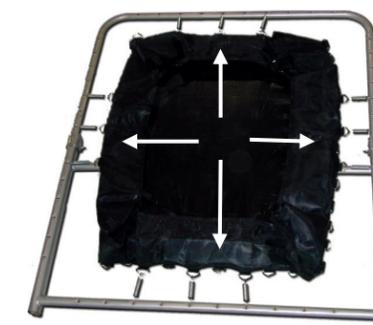


**Step 2:** Unfold the new mat and place it in the center of the frame making sure the top and bottom are correctly positioned.

**Tip:** Fold the mats spring cover flap inward and hook together for better access to the spring attaching loops.



**Step 5:** After you have 5 to 6 springs in place, finish replacing all the springs. When all springs are installed, fold the spring cover flap over the springs to complete the mat replacement.

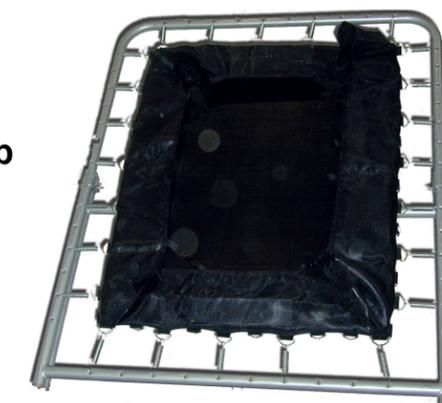

Shipping information for mat installation service: Please package the upper wall frame and all hardware with in a 90 inch L+W+H package for optimal shipping costs.

For return authorization, or general/warranty information go to: [www.lacrossewall.com](http://www.lacrossewall.com)

Ship to:  
In The Crease Goals  
26 Powell Lane  
Penn Yan, NY 14527  
(315)536-7417